




|                                                      |            |
|------------------------------------------------------|------------|
| Diameter Lubrication Hole (Outer Ring) (k)           | 4 mm       |
| Chamfer Dimension r <sub>3,4</sub> (min.)            | 0.6 mm     |
| Dynamic Radial Load                                  | 108900 lbf |
| Static Radial Load                                   | 205875 lbf |
| Max Speed                                            | 1000 rpm   |
| Weight                                               |            |
| Snap Ring Groove Diameter At Outer Ring (D3)         | 206 mm     |
| Distance Outer Ring Side Face - Snap Ring Groove(C2) | 3.9 mm     |
| DWidth Snap Ring Groove Outer Ring(b)                | 5.2 mm     |
| Chamfer Dimension r(min.)                            | 1.8 mm     |

|                                                  |        |
|--------------------------------------------------|--------|
| Shoulder Dia Of Inner Ring (d1)                  | 170 mm |
| Width Annular Lubrication Groove Outer Ring (b1) | 7 mm   |

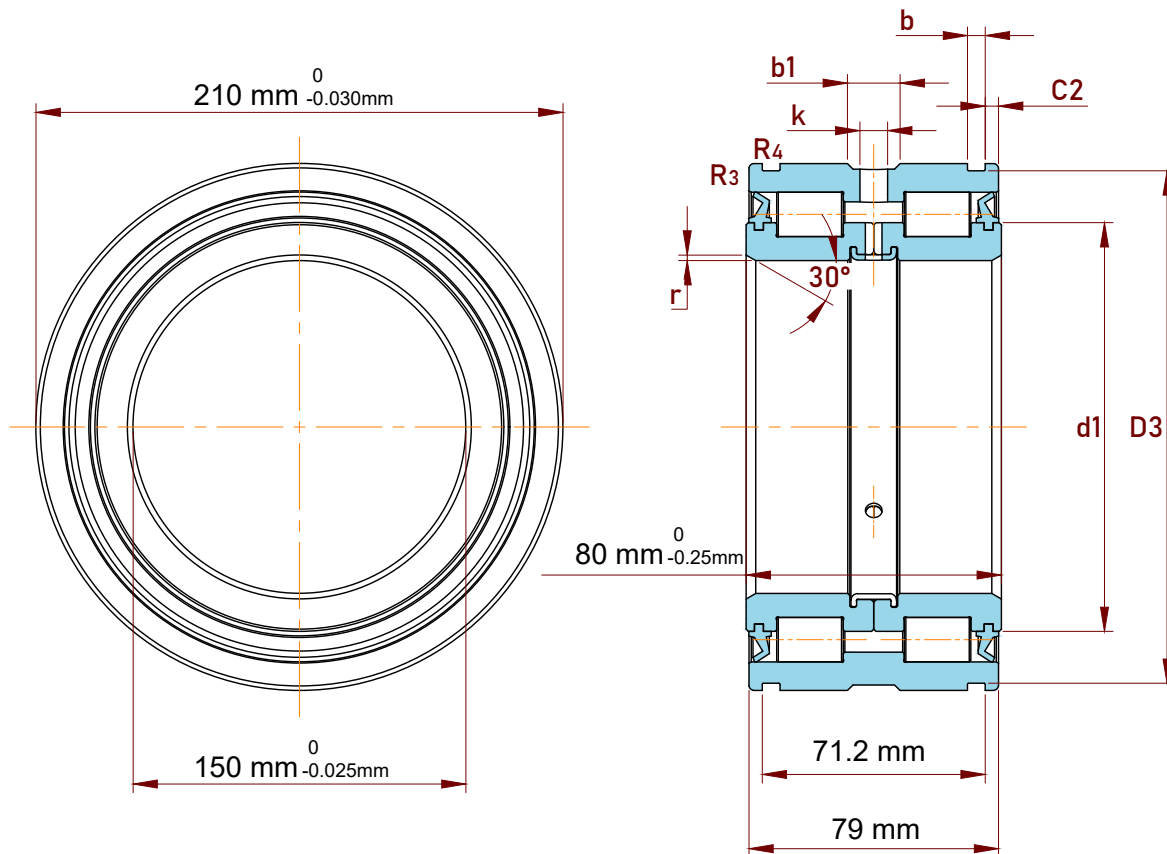

TFL Bearings Manufacturing Co., Ltd.

Jinan City, Shandong Province, China  
<https://www.sdtflbearings.com>  
[info@sdtflbearing.com](mailto:info@sdtflbearing.com)  
+86 15806631151

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. TFL makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

Part Number

**319430 B-2LS, Double Row Full Complement Cylindrical Roller Bearings**

Size

**150 mm x 210 mm x 80 mm**

Brand

**TFL**