



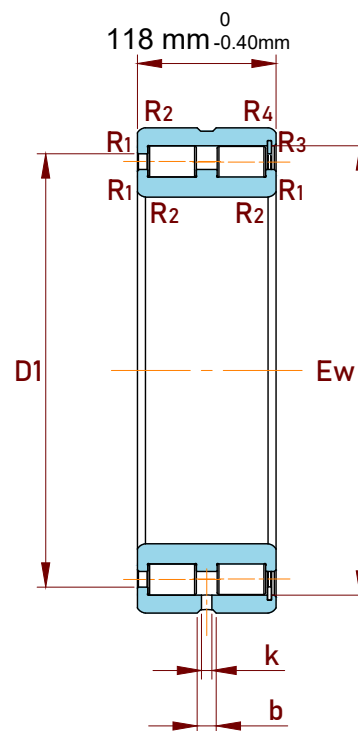

|                                                 |            |
|-------------------------------------------------|------------|
| Width Annular Lubrication Groove Outer Ring (b) |            |
| Diameter Lubrication Hole (Outer Ring) (k)      |            |
| Chamfer Dimension R1,2(min.)                    | 3 mm       |
| Chamfer Dimension R3,4(min.)                    | 3 mm       |
| Permissible Axial Displacement(max.)            | 6 mm       |
| Dynamic Radial Load                             | 402750 lbf |
| Static Radial Load                              | 956250 lbf |
| Max Speed                                       | 1000 rpm   |
| Weight                                          |            |

|                                   |  |
|-----------------------------------|--|
| Shoulder Diameter Inner Ring (d1) |  |
| Raceway Diameter Outer Ring (D1)  |  |

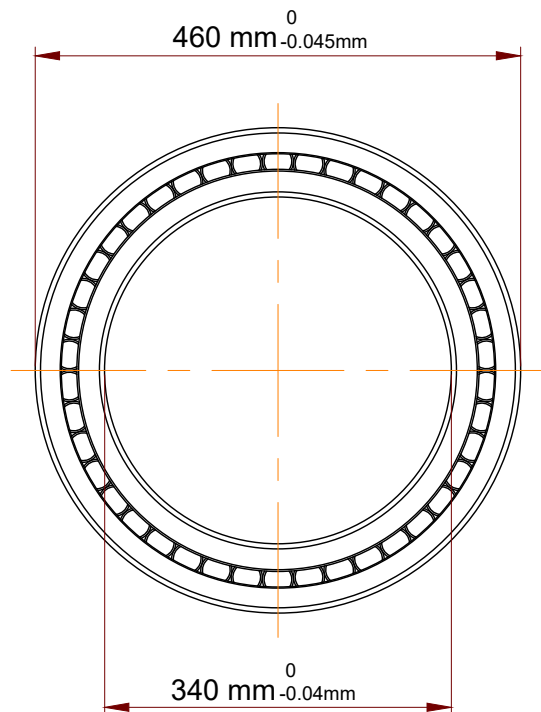

TFL Bearings Manufacturing Co., Ltd.

Jinan City, Shandong Province, China  
<https://www.sdftlbearings.com>  
[info@sdftlbearing.com](mailto:info@sdftlbearing.com)  
+86 15806631151

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. TFL makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

Part Number

Size

Brand

NNCF 4968 CV, Double Row Full Complement Cylindrical Roller Bearings

340 mm x 460 mm x 118 mm

TFL