



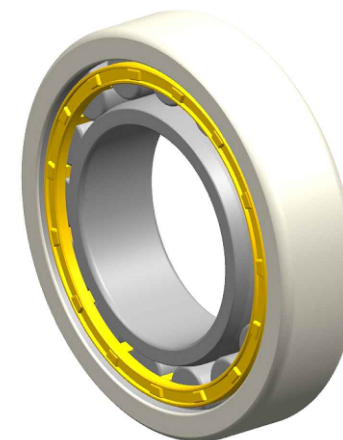

Net Weight	0.75 kg
Basic Dynamic Load Rating	255.0 kN
Basic Static Load Rating	265.0 kN
Reference Speed	4800.0r/min
Breakdown Voltage (DC)	3000VDC -1000VDC
Layer Thickness	500 μm
Electrical Resistance	Min. 50MΩ
Cage Material	Machined brass

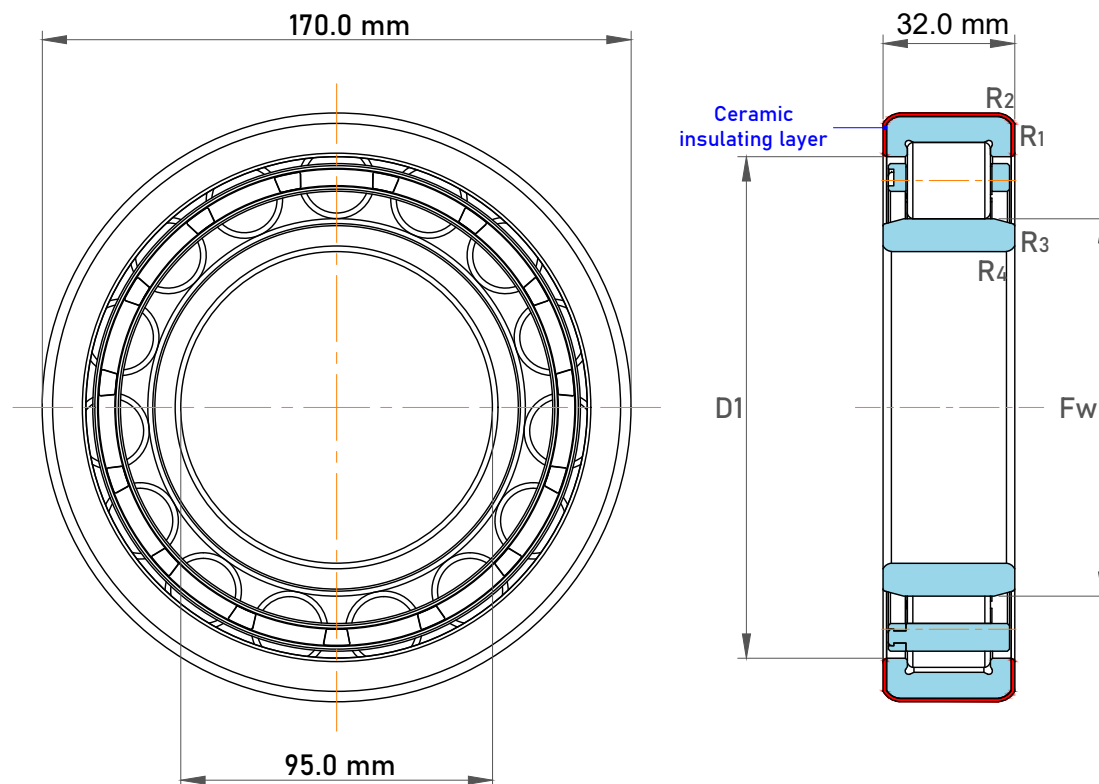

TFL Bearings Manufacturing Co., Ltd.

Jinan City, Shandong Province, China
<https://www.sdtflbearings.com>
info@sdtflbearing.com
+86 15806631151

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. TFL makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

Part Number

Size

Brand

NU 1015 M/C3VL0241, Electrically Insulated Single Row Cylindrical Roller Bearings

95.0 mm x 170.0 mm x 32.0 mm

TFL