




Net Weight	0.515 kg
Basic Dynamic Load Rating	75 kN
Basic Static Load Rating	69 kN
Reference Speed	6600r/min
Breakdown Voltage (DC)	≤1000v
Layer Thickness	200 um
Electrical Resistance	50MΩ (Dry); 10MΩ (Damp)
Cage Material	P - Plastic Molded Cage

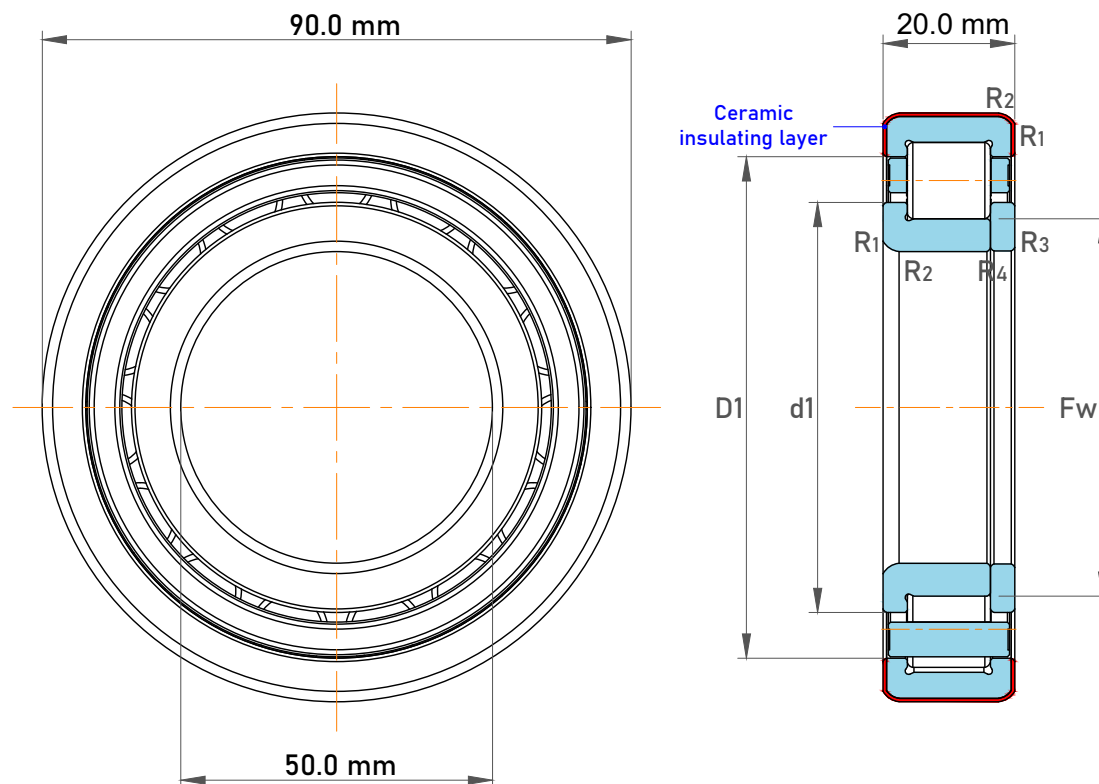

TFL Bearings Manufacturing Co., Ltd.

Jinan City, Shandong Province, China
<https://www.sdtflbearings.com>
info@sdtflbearing.com
 +86 15806631151

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. TFL makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

Part Number

Size

Brand

**NUP210-E-XL-TVP2-F1-J20AA-C4
 ,Current-Insulated Single Row
 Cylindrical Roller Bearing**

50.0 mm x 90.0 mm x 20.0 mm

FAG